


INDION® Membrane Bio-Reactor (MBR)

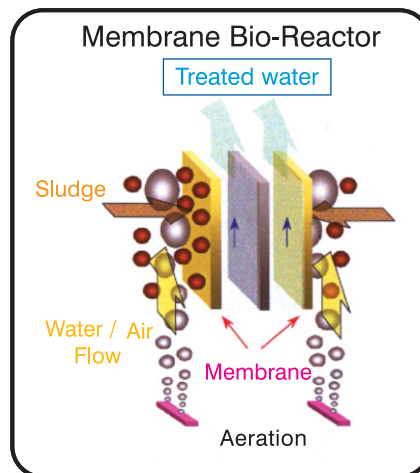

Process

INDION Membrane Bio-Reactor (MBR) is among the latest technologies in biological treatment, designed to produce high quality treated water from waste water with highest possible contaminant reduction without using any chemicals.

What makes the INDION MBR so successful is the effectiveness of the submerged membranes filtration in the biological process. It is this membrane treatment that produces high quality permeate from domestic sewage and industrial waste water. The submerged membranes used in the biological process remove suspended matter from activated sludge and provide stable and reliable unit with consistent performance.

Conventional System Vs. MBR

Conventional System 100%

INDION® MBR 25%

Biological Tank Volume

Features

- Single packaged unit with minimal civil construction
- Modular in construction and design
- Compact, requires 25% of a conventional system
- Low energy consumption (1.14 kwh/1000 gal) for filtration
- Up to 6 log (99.9999%) removal of total coliform
- No chemicals required during treatment


Advantages

- Minimum land usage
- Minimal power and chemical requirement
- Low operating cost

Applications

- Housing Complexes
- Townships
- Hotels
- Golf & Country Clubs
- Industrial Estates & Industrial Waste Treatment
- Waste recycle
- Existing plant upgrade and/or capacity expansion

Typical Treatment Scheme

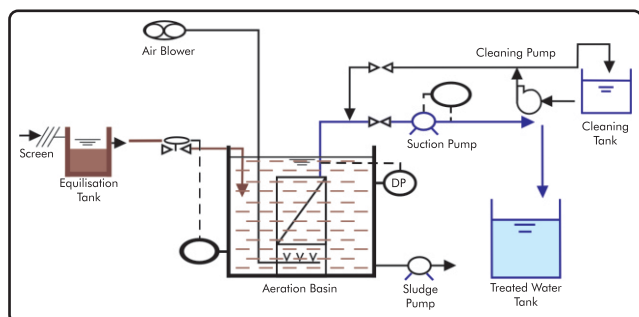

Typical Water Characteristics:

(Domestic Effluent)

BOD	:	< 5 ppm
COD	:	< 30 ppm
Turbidity	:	< 1 NTU
NH ₃ N*	:	> 90% reduction
P*	:	> 90% reduction
Total Coliform	:	99.9999% removal

*With appropriate biological design and/or chemical addition.

INDION MBR is also suitable for treating industrial effluents. The treated water characteristics may vary & can be established after piloting.

Standard Module Specifications **

Modules Model Name		INDION MBR 140-505	INDION MBR 140-100S	INDION MBR 140-200W	INDION MBR 140-200D
Standard flow (m ³ /day)		40-50	80-100	150-200	150-200
Housing Size	Width (mm)	810	810	810	810
	Length (mm)	950	1620	3260	1620
	Height (mm)	2100	2100	2100	4160
Weight (kg) dry membrane element		400	700	1430	1360
Material	Housing	SS 304			
	Permeate Water Manifold	PVC or SS 304			
	Aeration Diffuser	SS 304			

** Primary specifications for domestic effluent, case specific for industrial effluents.

Our state-of-the-art manufacturing facilities are ISO 9001, ISO 14001 & ISO 45001 certified.

To the best of our knowledge the information contained in this publication is accurate. Ion Exchange (India) Ltd. maintains a policy of continuous development and reserves the right to amend the information given herein without notice. Please contact our regional/branch offices for current product specifications.

INDION is the registered trademark of Ion Exchange (India) Ltd.



ION EXCHANGE (INDIA) LTD.

Corporate Office

Ion House, Dr. E. Moses Road, Mahalaxmi,
Mumbai - 400011 | Tel: +91 22 6231 2000
E-mail: ieil@ionexchange.co.in

Regional and Branch Offices

Bengaluru | Bhubaneswar | Chandigarh | Chennai
Delhi | Hyderabad | Kolkata | Lucknow | Vadodara
Vashi | Visakhapatnam

International Division

R-14, T.T.C MIDC, Thane - Belapur Road, Rabale,
Navi Mumbai - 400 701 | Tel: +91 22 6857 2400
E-mail: export.sales@ionexchange.co.in

Overseas Offices

Bangladesh | Canada | Indonesia | Kenya
Malaysia | Oman | Portugal | Saudi Arabia | Singapore
South Africa | Sri Lanka | Tanzania | Thailand | UAE | USA

Manufacturing Units

India - Ankleshwar | Hosur | Patancheru | Rabale | Verna | Wada

Overseas - Bangladesh | Indonesia | Saudi Arabia | UAE

All India Service and Dealer Network

www.ionexchangeglobal.com



WWT007R5-11230.0K